

FOR YOUR INFORMATION

NEW SOFTWARE FOR MX-80

New software is available for the MX-80 (PG16611A, PG16711) correcting punch-in/out timing problems when using the CB-140 remote. You can check which software is installed in the MX-80 without opening the machine. Just turn the power Off, hold down the Stop button and turn the power back On while continuing to hold the Stop button depressed. The software version number will appear for a few seconds in the tape time display. It is recommended that you upgrade all your customers. You may order the software directly from the Otari Parts Department.

While we are on the subject of software, following is a list of current software as of 2/20/90 for all Otari machines.

TAPE MACHINES

MX-50	PG13911D
MX-55	PG11711K
CTM-10	
Rec CPU	PG11411E
Osc	PG11511D
P/B CPU	PG11311K
MTR-10/12II	
PB-44UA	V1.11
PB-46TA	PG0111 V1.2
PB-4GEA	PG1111H
ZA-55H	PG07311D
MTR-20	
Master CPU	PG04911J
Align CPU	PG05411F
T.C. Kit	PG07311D
MX-70	
Single Eprom	PG05811G
Two Eprom	PG08621
	PG08622
MX-80	
Transport	PG16611A
Serial I/O	PG16711

MTR-90I	
CB-107	PG001313
	PG001323
	PG001333

MTR-90II	
Standard Three Prom CPU	
PG00431	
PG00432	V1.77
PG00433	
Three Prom CPU for use w/EC-101	
PG00431	
PG00432	V1.79
PG00433	
Single Prom "I-P" Lot	
Standard	PG06011D
w/EC-101	PG00411 V1.79
Single Prom "≥Q" Lot	
Standard	PG06011E
w/EC-101	PG00411 V1.80


MTR-100A	
Master CPU	PG1211E
I/O x (2)	PG12211C
Align CPU	PG12311F
Reel Control	PG12011A
DTR-900B	
Master CPU	PG09211A
A.L. Control	PG12611D

REMOTES/AUTOLOCATORS

CB-116	PG00811 V1.0
CB-120	
Master CPU	PG071211 N
	PG071221 N
	PG072116 I
	PG08411D
Time Code	PG13311C
CB-124	V2.52 Standard
CB-140	PG13411A
EC-101	PG13511A
EC-102/103	PG13711A
EC-104	

Otari Remote and Autolocator Dimensions

Top View

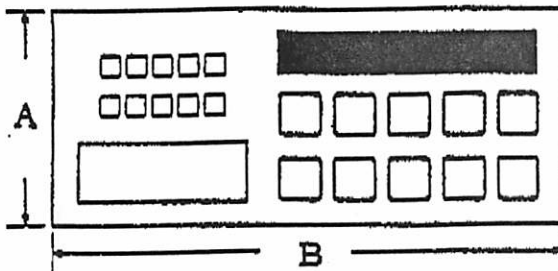


Side View



	A	B	C
CB-102	70	186	56
CB-109	149	335	80
CB-111	70	210	50
CB-114	67	180	51
CB-115/CB-113	205	388	148
CB-116/CB-110	170	304	83
CB-117	186	340	96
CB-118	186	335	104
CB-119	183	280	35
CB-120	178	340	86
CB-121	161	117	30
CB-127	75	205	40
CB-131	177	110	50
CB-140/CB-124	225	447	67

All dimensions are in millimeters. C dimensions include equipment feet (if applicable).

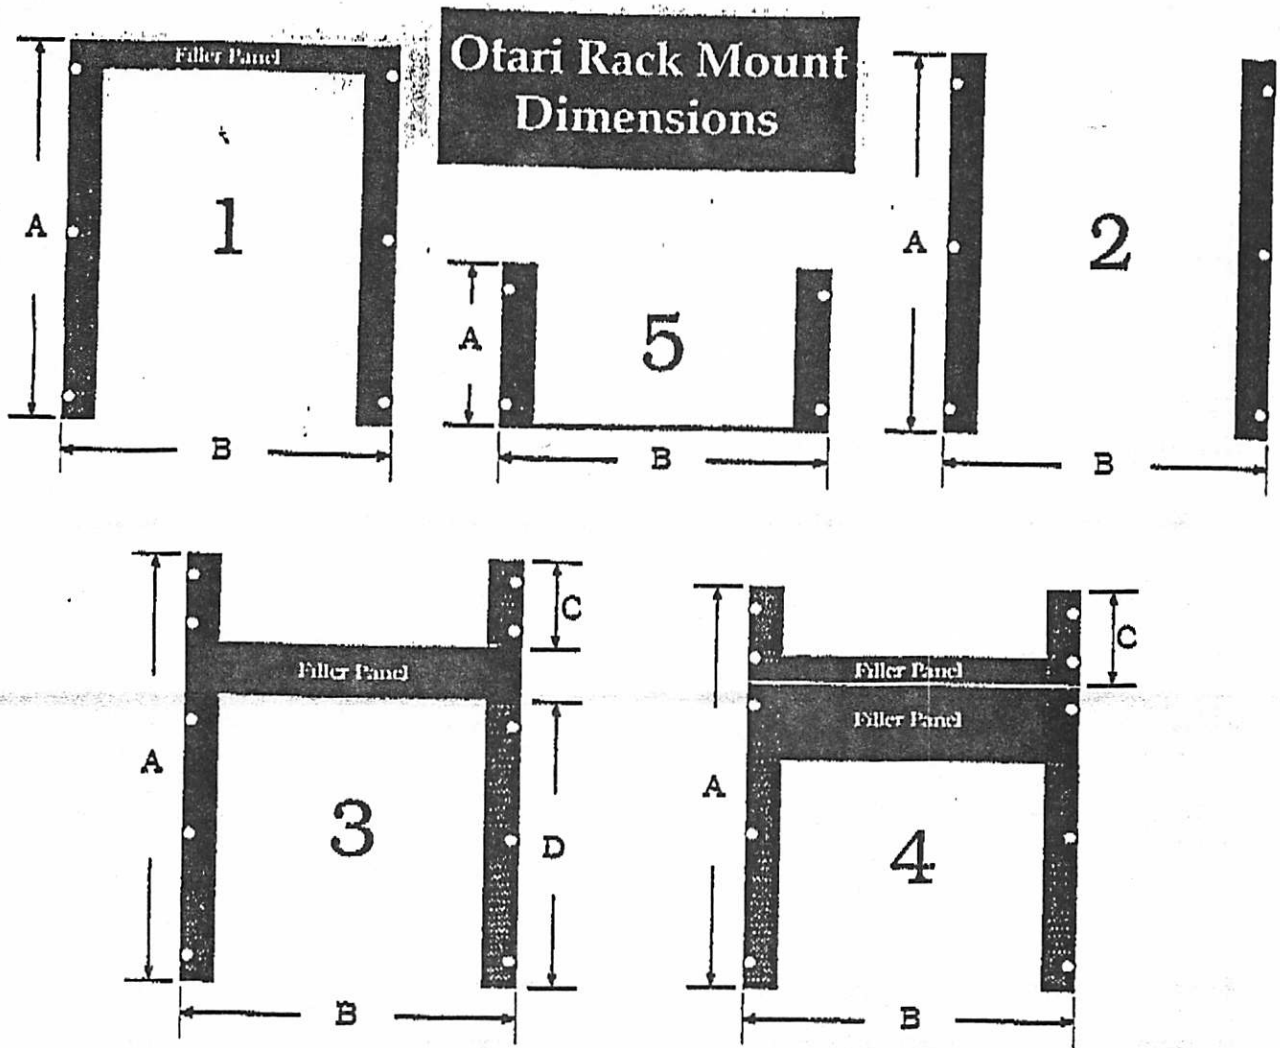

		A	B	C	D
1	BII (RK-2B)	533.4	482.6	n/a	n/a
	BQII (RK-2B)	"	"	n/a	n/a
	MX-50 (ZA-5EK)	487.4	"	n/a	n/a
2	MX-55N (ZB-51A)	487.4	482.6	n/a	n/a
3	MX-55NM (ZB-51F)	736.6	482.6	165.1	488.9
	MX-55TM (ZB-51F)	"	"	"	"
4	MKIII-2 (RK-32)	569.9	482.6	82.5	n/a
	MKIII-4 (RK-34)	"	"	"	"
5	CTM-10 (RK-CTM)	131.8	482.6	n/a	n/a

All dimensions are in millimeters. Rack flange holes are illustrative only.