



REK-O-KUT COMPANY

THE HYSTERESIS LINE OF STEREO TABLES

SINGLE-SPEED STEREO TABLES

NET PRICE ... \$49.95*



TURNTABLE KITS

Model K-33H—Single Speed Belt Drive

Furnished only in kit form.

ASSEMBLY TIME: Approximately 30 minutes with simple tools. Mounting template supplied.

NOISE LEVEL: 52 db. below average recording level.

MOTOR: New design, self-lubricating HYSTERESIS SYNCHRONOUS MOTOR.

SPEED: 33 1/3 RPM.

BELT: Special endless woven fabric with thickness held to micrometer tolerances. Has adjustment for belt tension.

STROBE DISC: Permanently affixed—permits instantaneous checking of speed.

MINIMUM DIMENSIONS FOR CABINET INSTALLATION WITH REK-O-KUT S-120 ARM: 17 3/4" x 16 3/4"; Height above Deck 3"; Height below Deck 4".

TURNTABLE: Solid Cast Aluminum Lathe Turned. Tapered for easy disc handling.

FINISH: Silvertone Aluminum.

SHIPPING WEIGHT: 15 lbs.

MODEL K-33, AS K-33H, BUT WITH 4-POLE MOTOR.....NET \$39.95*

SHIPPING WEIGHT: 15 lbs.

NET PRICE ... \$69.95*



Model N33H—Single Speed Belt Drive

NOISE LEVEL: 53 db below average recording level.

MOTOR: New design, self-lubricating, HYSTERESIS SYNCHRONOUS MOTOR.

CHASSIS DECK: 15 1/2 x 15 Aluminum.

SPEED: 33 1/3 RPM.

BELT: Special endless woven fabric with thickness held to micrometer tolerances. Has adjustment for belt tension.

STROBE DISC: Permanently affixed—permits instantaneous checking of speed.

MINIMUM DIMENSIONS FOR CABINET INSTALLATION WITH REK-O-KUT S-120 ARM: 17 3/4 x 16 3/4.

TURNTABLE: Solid Cast Aluminum Lathe Turned. Tapered for easy disc handling.

FINISH: Decorator Grey and Two-tone Aluminum.

SHIPPING WEIGHT: 17 lbs.

THREE-SPEED STEREO TABLES

NET PRICE ... \$129.95*



Model B-12H 3 Speeds

The aristocrat of the STEREO TABLE Series. As a record reproducing device, it represents the closest approach to perfection ever attained.

SPECIFICATIONS:

NOISE LEVEL: 57 db below average recording level.

MOTOR: Custom-built HYSTERESIS SYNCHRONOUS MOTOR.

SPEEDS: 33 1/3, 45 and 78 rpm.

SPEED SELECTION: Single selector knob. Switching to speed position starts motor. Setting to "off" position adjacent to speed shuts off motor and disengages idler.

STROBE DISC: Permanently affixed—permits instantaneous checking of all speeds.

45 RPM HUB: Built-in—retractable—requires no external adapter.

PILOT LIGHT: Jewelled neon light acts as "on/off" indicator.

CHASSIS DECK: Cross-ribbed cast aluminum. Designed for flush-mounting in rectangular cut-out.


MINIMUM DIMENSIONS FOR CABINET INSTALLATION: Left to Right 17 3/4"; Front to Back 16"; Height above Deck 3"; Height below Deck 6 1/2".

TURNTABLE: Solid Cast Aluminum—Lathe Turned.

FINISH: Silvertone Aluminum

SHIPPING WEIGHT: 19 lbs.

NET PRICE ... \$99.95*



Model B-12GH 3 Speeds

All specifications are identical to the B-12H with the following exceptions:

NOISE LEVEL: 53 db below average recording level.

MOTOR: New design, self-lubricating, HYSTERESIS SYNCHRONOUS MOTOR.

SHIPPING WEIGHT: 18 lbs.

Model B-12—3 Speeds

All specifications are identical to the B-12H with the following exceptions:

NOISE LEVEL: 50 db below average recording level.

MOTOR: Induction—4-pole built to REK-O-KUT specifications.

SHIPPING WEIGHT: 18 lbs.

NET PRICE ... \$84.95*


The policy of Rek-O-Kut Co., Inc., is one of continual improvement in design and manufacture. Hence, we reserve the right to change specifications and design without notice.

REK-O-KUT COMPANY



THE HYSTERESIS LINE OF STEREO TABLES

TWO-SPEED STEREO TABLES



NET PRICE . . .
\$59.95*

Model L-34: 33 1/3 & 45 rpm
Model L-37: 33 1/3 & 78 rpm

SPECIFICATIONS:

NOISE LEVEL: 40 db below average recording level.
MOTOR: Induction—4-pole—built to Rek-O-Kut specifications.
SPEEDS: Model L-34—33 1/3 and 45 rpm; Model L-37—33 1/3 and 78 rpm.
SPEED SELECTION: Slide shift with intermediate "off." Locks in either speed position.
STROBE DISC: Permanently affixed—permits instantaneous checking of both speeds.
45 RPM HUB: Built-in—retractable—requires no external adapter on L-34.
MINIMUM DIMENSIONS FOR CABINET INSTALLATION: Left to Right 16 1/2"; Front to Back 16 1/4"; Height above Deck 3"; Height below Deck 5 1/4".
TURNTABLE: Solid Cast Aluminum Lathe Turned.
FINISH: Silvertone Aluminum.
SHIPPING WEIGHT: 15 pounds.




NET PRICE . . .
\$79.95*

Model L-34H: 33 1/3 & 45 rpm
Model L-37H: 33 1/3 & 78 rpm

SPECIFICATIONS:

NOISE LEVEL: 50 db below average recording level.
MOTOR: New design, self-lubricating HYSTERESIS SYNCHRONOUS MOTOR.
SPEEDS: Model L-34H—33 1/3 and 45 rpm; Model L-37H—33 1/3 and 78 rpm.
SPEED SELECTION: Slide shift with intermediate "off." Locks in either speed position.
STROBE DISC: Permanently affixed—permits instantaneous checking of both speeds.
45 RPM HUB: Built-in—retractable—requires no external adapter on L-34H.
MINIMUM DIMENSIONS FOR CABINET INSTALLATION: Left to Right 16 1/2"; Front to Back 16 1/4"; Height above Deck 3"; Height below Deck 5 1/4".
TURNTABLE: Solid Cast Aluminum Lathe Turned.
FINISH: Silvertone Aluminum.
SHIPPING WEIGHT: 15 pounds.

STEREO TABLE BASES

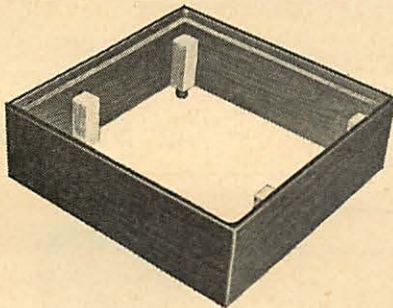

UNIVERSAL BASES (Wt.: 8 lbs.)


Model	Accommodates Turntable Model	Description	Net Price	Zone 2 Net Price
BW	ALL MODELS	Solid Walnut	\$19.95	\$21.25
BU	ALL MODELS	Unfnsh.	10.95	12.25
LU	L-34, L-37, L-34H, L-37H	Unfn. (One pc.—incl. motor board)	8.95	10.20
KU	K-33, K-33H	Unfn. (One pc.—incl. motor board)	8.95	10.20
MOTOR BOARDS				
MB-1	B-12; B-12H and B-12GH	Unfinished	2.95	3.25
MB-2	B-12; B-12H and B-12GH	Solid Walnut	3.95	4.25
ML-3	L-34 and L-37	White Lacquer	8.50	9.25
MK-3	K-33	White Lacquer	7.95	8.75
MK-1	K-33	Unfinished	4.95	5.75
NOTE: Model N-33H Turntable requires NO motor board				
ROLL-OUT PLATFORM				
ROP-12	ALL MODELS	Stained Plywood	7.95	8.75
16" EXTENSION				
X-16	Permits mounting of REK-O-KUT S-160, 16" Tonearm on ALL MODEL BASES		6.95	7.75

12 AND 16-INCH STEREO TONEARMS

Both arms are identical in design and construction except for length and offset angle. Non-ferrous metal alloys are used throughout.

SPECIFICATIONS and FEATURES:

- Tubular Arm Body
- Interchangeable 4-wire cartridge shell secured to arm body by bayonet lock
- Silver-plated, spring-loaded pin terminals establish positive contact between shell and arm.
- Shells accommodate all standard cartridges
- Arm resonance well below audible band
- Adjustable for turntable height
- Dual, ball bearing races for horizontal movement
- Vertical movement pivots in 1mm. chrome-steel ball bearings
- Stylus pressure adjusted by means of self-locking micrometer threaded counterweight
- Dual-function arm rest clamps and secures arm when not in use

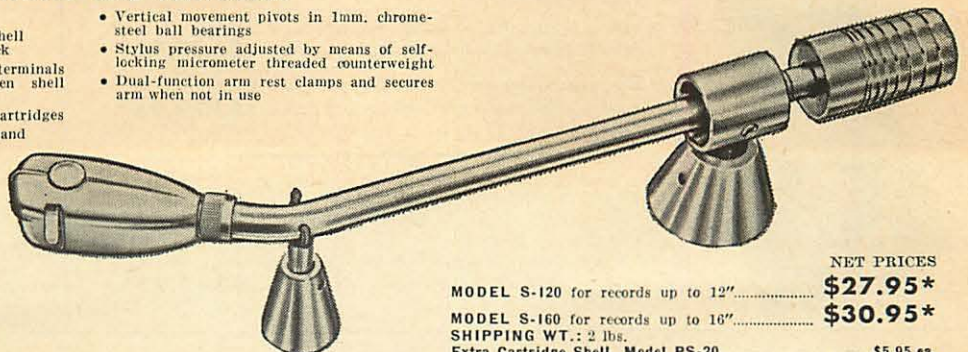

NET PRICES
MODEL S-120 for records up to 12"..... \$27.95*
MODEL S-160 for records up to 16"..... \$30.95*
SHIPPING WT.: 2 lbs.
Extra Cartridge Shell, Model PS-20.....\$5.95 ea.

Note: prices less cartridge

Prices of Stereotables (as illustrated) do not include tonearm or base.

MODEL CR heavy duty portable carrying case for Stereotables . . . \$39.95 net. Specify turntable model when ordering.



REK-O-KUT COMPANY

Manufacturers of Fine Recording and Playback Equipment, and Specialized Sound Systems.

DISC RECORDING EQUIPMENT Imperial



The "Imperial," America's finest professional 13 1/4" disc recorder, is built to meet the respective needs of the Professional Recordist, Musician, Educator and Recording Enthusiast who wants to make permanent, professional recordings. The "Imperial" embodies the most advanced design, engineering and production techniques in the disc recording industry. The many exclusive operating features incorporated in the "Imperial" simplify and improve the art of disc recording.

PROFESSIONAL DISC RECORDER AND PLAYBACK REPRODUCER

FREQUENCY RESPONSE: ± 1 db from 30 to 20,000 cycles at normal setting of equalizer controls.
POWER OUTPUT: 13.5 watts at less than 3% total harmonic distortion into resistive load.
TREBLE EQUALIZER: Boost of 14 db and attenuation of 15 db above 8000 cycles, continuously variable.
BASS EQUALIZER: Boost of 14 db and attenuation of 14 db below 50 cycles, continuously variable.
INPUT CHANNELS: Two for high impedance microphone, one for phono (magnetic cartridge) and one high level for radio and tape.
GAIN: Microphones — 120 db; Phono — 90 db; Radio — 80 db.
OUTPUT IMPEDANCES: 4, 8, 15 and 500 ohms for cutter and speaker.
OUTPUT SELECTOR: Three positions providing — recording, playback and public address. Microphones are muted in play-back position.
MONITORING: A switch is provided giving three positions of monitor level — off, medium, loud. Speaker or headphones may be used. Meter on front panel indicates correct recording level.
HUM AND NOISE: 64 db below 13.5 watts with all controls turned for maximum hum and noise output.
CONTROLS: Microphone "1", microphone "2", radio-phone fader, output selector, treble equalizer, bass equalizer, monitor.
TUBE COMPLEMENT: (2) 6SJ7; (2) 6SL7; (1) 6SC7; (2) 6VC; (1) 5Y3.
POWER REQUIREMENTS: 105-125 volts, 50-60 cycles.
POWER CONSUMED: 100 watts.
SPEAKER: 10" PM type. Custom-built rigid REK-O-KUT specifications for extra power and wide range. Mounted into detachable cover of case.
CASE: Sturdy plywood cover with rich gray leatherette. Built to withstand rough usage. **DIMENSIONS:** 25 x 22 x 12 inches.
WEIGHT: 77 lbs.
 Equipped with 120-line Leadscrew

**IMPERIAL
NET PRICE \$599.95***

LEADSCREWS—for Imperial—See Model M-128.

SPECIFICATIONS:


MOTOR: Hysteresis Synchronous motor fitted with lamitex drive pulley. Suspended in shock mounts to prevent transmission of motor vibration.
RECORDING AREA: Records from 6" up to 13 1/4" masters.
SPEEDS: Simple, finger-tip speed control. Records at both 33-1/3 & 78 R.P.M. Includes Idler and Adapter for 45 R.P.M. recordings.
OVERHEAD RECORDING LATHE: Model M-12S Lathe.
 • HAND CRANK for run-in and run-off spiral grooves.
 • PROVISION FOR INTERCHANGING LEADSCREWS for Standard and Microgroove.
 • LIFTOMATIC SAFETY CAM prevents double cutting and stylus damage. Automatically raises cutter as center of disc is approached.
 • CALIBRATED SCALE FOR TIMING.
RECORDING HEAD: Model H-4—response from 30-10,000 cycles.
PLAYBACK ARM: Model S-160 for records up to 16" — with dual-sapphire magnetic cartridge.
AMPLIFIER: Model R-8A Universal Recording Amplifier.

Model R-8A Available Separately **\$159.95***
 Model C-85 Portable Amplifier Case **22.95***

RECORD PLAYERS

These record players are designed to operate into any amplifier or for dubbing records onto tape, wire or disc. May be used with radio, TV receiver, sound projector, recorder, etc.

Models with magnetic cartridges require pre-amplifiers. Mounted in sturdy plywood, leatherette-covered case with detachable covers.

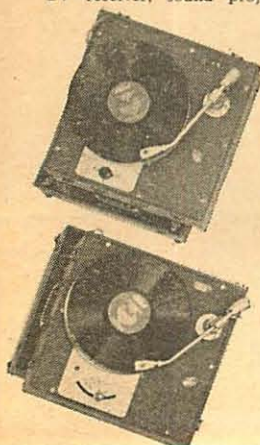

P-34C with 2-speed L-34 (33-45) Turntable and S-120 Arm with dual sapphire needles and ceramic cartridge. NET PRICE..... **\$124.95***

P-37C with 2-speed L-37 (33-78) Turntable and S-120 Arm with dual sapphire needles and ceramic cartridge. NET PRICE..... **\$124.95***

P-34M with 2-speed L-34 (33-45) Turntable and S-120 Arm with dual sapphire needles and magnetic cartridge. NET PRICE..... **\$129.95***

P-37M with 2-speed L-37 (33-78) Turntable and S-120 Arm with dual sapphire needles and magnetic cartridge. NET PRICE..... **\$129.95***

P-VC with Variable Speed CVS-12 Turntable and S-120 Arm with dual sapphire needles and ceramic cartridge. NET PRICE..... **\$139.95***

P-VM with Variable Speed CVS-12 Turntable and S-120 Arm with dual sapphire needles and magnetic cartridge. NET PRICE..... **\$144.95***



VARIABLE-SPEED TURNTABLE CVS-12

The CVS-12 permits continuous speed variation from 25 rpm to 100 rpm without resetting or stopping the record. It can therefore be used with 33-1/3, 45 and 78 rpm records, and permits them to be slowed down to as little as 1/3 normal tempo or speeded up to as much as 300%. It is standard equipment with the P-VC and P-VM players. NET PRICE. **\$89.95***

NOTE: This turntable operates at either 50 or 60 cycles. At 50 cycles speed can be varied from 20 rpm to 85 rpm.
 Shipping Weight: 15 lbs.

* All prices slightly higher West of Rockies.

NOTE: All Rek-O-Kut Players and Turntables are supplied for 110-120 volts, 60-cycle AC operation. Available for other voltages and frequencies at additional cost.

The policy of Rek-O-Kut Co., Inc. is one of continual improvement in design and manufacture. Hence, we reserve the right to change specifications and design without notice.

REK-O-KUT COMPANY



Manufacturers of Fine Recording and Playback Equipment, and Specialized Sound Systems.

ALL REK-O-KUT RECORDING TURNTABLES

are made of cast aluminum, lathe-turned for accuracy and driven with shock-mounted HYSTERESIS SYNCHRONOUS motors equipped with lamitex pulleys.

MODEL R-16H DELUXE 2 SPEED (33-78) 16" RECORDING TURNTABLE With Accessory Idler For 45 rpm Speed

The outstanding value in the recording field. Ruggedly constructed and precisely machined, the Model R-16H turntable will maintain the constant, wow-free speed and smoothness demanded in broadcast work. The Model M-5S Overhead Cutting Mechanism mounts to the R-16H turntable in a matter of moments.

CHASSIS: Radial-ribbed aluminum casting. Designed for flush mounting in rectangular cut-out.

IDLERS: Neoprene compound for maximum traction and silent operation.

OILING: Shafts and bearings are self-oiling. Require infrequent lubrication.

SPEED CHANGE: Mastermatic self-locking instantaneous speed shift.

FINISH: Gray wrinkle.

DIMENSIONS: 18 3/4" x 20". Fits existing consoles and cabinets with slight modification.

TURNTABLE: Solid cast aluminum-Lathe turned.

SHIPPING WT: 34 pounds.

NOTE: Model R-16H Recording Turntable mounts directly on Model C-7B Console without use of either screw or bolts.



NET PRICE:
\$250.00*

(Less Lathe & Cutter)

MODEL TR-43H 2 SPEED (33-78) 12" RECORDING TURNTABLE With Accessory Idler for 45 rpm Speed

Design and construction of the Model TR-43H is similar to the Rek-O-Kut 16" professional recording tables. The Model M-12S Overhead Recording mechanism is mounted to the chassis in a few moments.

CHASSIS: Cast ribbed aluminum drilled to accommodate the M-12S Lathe.

IDLERS: Neoprene compound for maximum traction.

OILING: Shafts and bearings are self-oiling. Require infrequent lubrication.

SPEEDS: Instantaneous speed shift engages either 78 or 33-1/3 rpm idlers.

FINISH: Gray wrinkle.

DIMENSIONS: Front to back 16 1/2"; width 16"; height above motor board 1 3/8"; depth below motor board 5".

SHIPPING WEIGHT: 20 lbs.



NET PRICE:
\$149.95*

(Less Lathe & Cutter)

LEADSCREWS FOR OVERHEAD LATHES

Lines/inch	Model	Net Price
120	MS-120	\$39.95
150	MS-150	39.95
210	MS-210	49.95
216		
240	MS-240	49.95
270	MS-270	49.95

Lines/inch	Model	Net Price
120	M12S-120	\$35.95
150	M12S-150	35.95
210	M12S-210	44.95
216		
240	M12S-240	44.95
270	M12S-270	44.95

Lines/inch	Model	Net Price
120	M12-120	\$19.95
150		
210		
216	M12-216	29.95
240	M12-240	29.95
270		

Leadscrews of 210 lines/inch or more = microgroove.

MASTER-PRO OVERHEAD RECORDING LATHES

MODEL M-5S 16" OVERHEAD LATHE

A precise tool for professional work. Working surfaces and moving parts are hardened, ground and polished to a micro finish. The Master-Pro is a universal machine that can be readily attached to all 12" and 16" recording turntables as well as the Rek-O-Kut model R-16H recording table.

HANDCRANK: For run-in and run-off spiral grooves.

DUAL CLUTCH SPIRALING CONTROL: Eliminates danger of disc spoilage while crank handle is in motion.


ANGLE OF CUT: Controlled by simple adjustment.

DIMENSIONS: Length 16"; width 6 1/2"; height 9".

WEIGHT: 16 lbs.

Supplied with 120-line leadscrew.

MODEL M-5S less cutter NET PRICE **\$200.00***

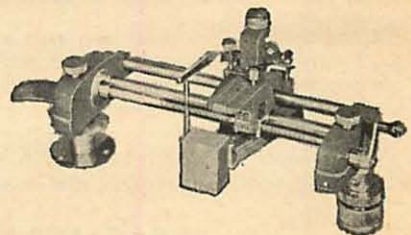

MODEL M-12S 12" OVERHEAD LATHE

This professional lathe is designed to very exacting specifications and features the following:


- Interchangeable Leadscrews.
- Hand-crank for run-in and run-off Spiral Grooves.
- Timing Scale.
- Accommodate Standard Cutting Heads.
- Depth of Cut Adjustment.

LIFT-O-MATIC: Automatically lifts cutter from disc as it approaches end of lead-screw.

Designed for instantaneous replacement of the M-12.

Supplied with 120-line leadscrew

MODEL M-12S less cutter NET PRICE **\$150.00***

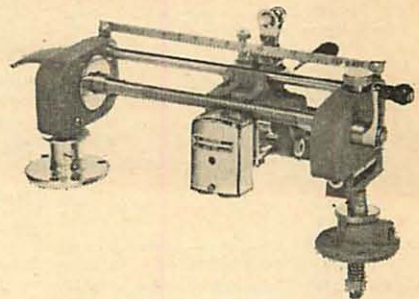

SPECIFICATIONS FOR H-4 CUTTER.....\$75.00 NET

Impedance: 8-15-500 ohms. Sensitivity: Approx. 1.8 watts at 1000 cycles for 6.3 cm/sec peak recorded velocity. Freq. Resp.: +2 db from 30 to 10,000 cycles (with proper equalization). Distortion: 1.5% at 1000 c.p.s. Mounting: Universal mounting for most lathes. 1 3/8" between mounting holes of cutter. Stylus: Short shank steel or sapphire 5/8" overall stylus length.

* All prices slightly higher West of Rockies.

SPECIFICATIONS FOR H-5 CUTTER.....\$115.00 NET

Impedance: 8-15-500 ohms. Sensitivity: Approx. 1.8 watts at 1000 cycles for 6.3 cm/sec peak recorded velocity. Freq. Resp.: +2 db from 30 to 13,000 cycles (with proper equalization). Distortion: 1.2% at 1000 c.p.s. Mounting: Universal mounting for most lathes. 1 3/8" between mounting holes of cutter. Stylus: Short shank steel or sapphire 5/8" overall stylus length.

The policy of Rek-O-Kut Co., Inc. is one of continual improvement in design and manufacture. Hence, we reserve the right to change specifications and design without notice.



REK-O-KUT COMPANY

Manufacturers of Fine Recording and Playback Equipment, and Specialized Sound Systems,



16" PRECISION TURNTABLE

The MODEL B-16H 3 Speeds

CONSOLE CABINET

for B-16H & other REK-O-KUT Turntables

Offers the broadcaster and recording studio the finest professional performance at the lowest cost. The turntable itself is precision lathe-turned, non-magnetic, cast aluminum - dynamically balanced - and with an extra-heavy rim for effective flywheel action. Turntable diameter is standardized at 15 3/4 inches to allow a 1/2-inch overhang for cueing. It is internally rim-driven by means of neoprene compound idlers. All inter-moving parts are case-hardened and ground to a micro finish. Rotates on a single-ball pivot which takes the entire thrust of the turntable shaft.



Extremely low distortion has been achieved through effective acoustical damping - through special attention to motor bearings, motor suspension, idler design, concentricity of pulleys and all the other elements essential to smoothness, quiet and overall quality of performance. Rumble, wow and flutter and speed regulation are well within NARTB standards. Requiring no more than routine maintenance, all parts are readily and easily accessible.

Designed to accommodate the B-16H Turntable without the use of either screws or bolts. Floats on felt. Has 2 storage compartments and piano-hinged doors with flush ring-latches. Includes built-in electrical outlet and adjustable leveling domes. Metallic gray finish. Dimensions: 33" high x 22" wide x 20 1/2" deep.

SPECIFICATIONS:

SPEEDS: 33 1/3, 45 and 78 rpm.

SPEED SELECTION: Mastermatic, self-locking, instantaneous shift. Engages either idler without stopping turntable or removing disc.

STARTING: From standing start to operating speed -
at 78 rpm 3/4 turn
at 33 1/3 and 45 rpm 1/4 turn

MOTOR: Self-lubricating, custom-built HYSTERESIS SYNCHRONOUS.

NOISE LEVEL: 50 db below average recording level.

45 RPM HUB: Built-in - retractable - requires no external adapter.

STROBE DISC: Permanently affixed - permits instantaneous checking of all speeds.

CHASSIS DECK: Radial-ribbed aluminum casting. Designed for flush mounting in rectangular cut-out. PRE-DRILLED; for ready mounting of Rek-O-Kut Turntable Arm Model S-160.

DIMENSIONS: 18 3/4" x 20". Fits existing consoles and cabinets with slight modification.

CLEARANCE REQUIRED: Above Deck - 1 1/2". Below deck - 6 1/2".

FINISH: Wrinkle gray.

SHIPPING WEIGHT: 34 pounds.

NET PRICE **\$250.00***

MODEL C-7B NET PRICE **\$115.00***

Shipping weight: 65 lbs.

Identical to C-7B but with the addition of a 3/4" motor board to accommodate various REK-O-KUT turntables.
MODEL C-7BT NET PRICE **\$124.95***

Shipping weight: 70 lbs.

NOTE: All Rek-O-Kut Turntables are supplied for 110-120 volt, 60-cycle AC operation. Available in other voltages and frequencies at additional cost.

*All prices slightly higher West of Rockies.

The policy of Rek-O-Kut Co., Inc., is one of continual improvement in design and manufacture. Hence, we reserve the right to change specifications and design without notice.